




INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

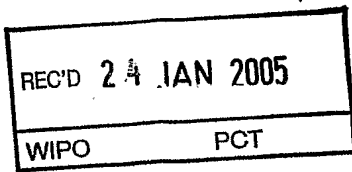

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 14 January 2005



Handwritten text, possibly a signature or date, located in the upper right quadrant of the page.

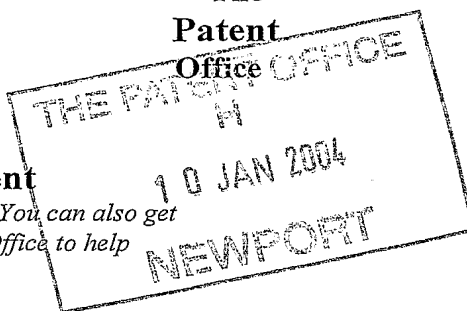

1 / 7 7

12JAN04 E864309-6 D00335  
P01/7700 0.00-0400433.9 ACCOUNT CHA

The Patent Office

Cardiff Road  
Newport  
Gwent NP10 8QQ

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1.	Your reference	NMM/P410173GB		
2.	Patent application number (The Patent Office will fill in this part)	0400433.9		
3.	Full name, address and postcode of the or of each applicant ( <i>underline all surnames</i> )	<b>WOLFE DESIGNS LIMITED</b> Clydesdale Place, Moss Side, Preston Lancashire. PR5 3QS		
	Patents ADP number ( <i>if you know it</i> )	8483 166002		
	If the applicant is a corporate body, give the country/state of its incorporation			
4.	Title of the invention	ACCESS TOWER		
5.	Name of your agent ( <i>if you have one</i> )	W. P. THOMPSON & CO.		
	"Address for service" in the United Kingdom to which all correspondence should be sent ( <i>including the postcode</i> )	Coopers Building, Church Street, Liverpool L1 3AB		
	Patents ADP number ( <i>if you know it</i> )	0000158001 ✓		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and ( <i>if you know it</i> ) the or each application number	Country	Priority application number ( <i>if you know it</i> )	Date of filing ( <i>Day/month/year</i> )
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing ( <i>Day/month/year</i> )	
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? ( <i>Answer 'yes' if:</i> a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or) any named applicant is a corporate body. See note (d)	YES		

9. Enter then number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

11

Claims(s)

Abstract

Drawing(s)

5

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination  
*Patents Form 10/77*

Any other documents  
(Please specify)

11. I/We request the grant of a patent on the basis of this application

Signature

Date 09/01/2004

*W P Thompson*

12. Name and daytime telephone number of person to contact in the United Kingdom
- N.M. MANLEY  
0151-709-3961

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

DESCRIPTIONACCESS TOWER

The present invention relates to access towers and in particular to access towers which can be extended into an operative condition and retracted into a  
5       stowed condition.

Access towers are used when it is necessary for work to be carried out for a substantial period of time at a height which is normally inaccessible. One form of access tower is in the form of interconnecting sections of scaffolding which, when assembled, support a working platform from which work may be carried  
10       out. Another form of access tower is in the form of a working platform located at the upper end of a "lazy tongs" or scissor lift type framework and which is extensible and retractable by means of hydraulic rams extending between different sections of the scissor lift framework.

The problem with the first type of access tower is that it requires skilled  
15       personnel to assemble it, since it is normally classified as being scaffolding. Moreover, the assembled tower is usable at one height only and must be partially dismantled or added to if the working platform is required at a different height.

The second type of access tower suffers from the requirement for a hydraulic pressure source for operation, which increases the cost and requires  
20       training before it can be safely used.

It is an object of the present invention to provide an access tower which can be quickly and easily erected at the desired height without the necessity for external power.

In accordance with a first aspect of the present invention, an access tower  
25       comprises a base, a scissor lift means having a lower end mounted on the base, a working platform mounted at the upper end of the scissor lift means and means

for applying a force to the lower end of the scissor lift means to urge the scissor lift means into an extended condition.

Preferably, the means for applying a force comprises biasing means acting on the lower end of the scissor lift means which urge the scissor lift means into an extended condition.

By urging the scissor lift means into an extended condition, it is possible for the access tower to be erected and retracted manually, without the need for an external power source such as hydraulic pressure.

Preferably, the biasing means acts only on the lower end of the scissor lift means. This ensures that the forces supporting the working platform and the weight of the scissor lift means itself are transmitted evenly through the whole of the scissor lift means, in contrast to the prior art hydraulically actuated access towers, resulting in easier construction and improved reliability

Preferably, the biasing means comprises spring means. The spring means may comprise tension spring means and/or compression spring means.

In one embodiment the spring means acts on a mounting which is movably, e.g. slidably, mounted on the base. The mounting may comprise a block which is slidably disposed with respect to the base. In one arrangement, the block is slidably disposed in a hollow frame member forming part of the base.

Preferably, the biasing means applies a force which compensates for at least 75% of the effort required to raise the access lower to an erected condition, more preferably 85% or 90% of the effort. Ideally, the biasing means applies a force which compensates for substantially 100% of the effort required to raise the access tower to an erected condition.

Instead of, or in addition to, the biasing means there may be other means for applying force to the lower end of the scissor lift means to urge the scissors lift

means into an extended condition. Preferably, such other means are manually powered.

5 In accordance with a second aspect of the present invention, an access tower comprises a base, scissor lift means having a lower end mounted on the base and a working platform mounted at the upper end of the scissor lift means, the scissor lift means comprising two spaced-apart lazy tongs assemblies and further comprising a plurality of laterally extending bars extending between the two lazy tongs assemblies.

10 The provision of the laterally extending bars between the two lazy tongs assemblies effectively forms rungs of a ladder to allow access to be gained to the working platform.

15 The laterally extending bars may extend between load-supporting members on each of the two lazy tongs assemblies, for example, between pivot points on each of the two lazy tongs assemblies. The laterally extending bars may form a pivot for each of the two lazy tongs assemblies.

Alternatively, or in addition, the scissor lift means may comprise a laterally-extending bar mounted on a linkage connected to one or both of the lazy tongs assemblies which causes the bar to rise and fall with the scissor lift means.

20 The linkage may comprise two parallelogram linkages located one on each of the lazy tongs assemblies.

By way of example only, a specific embodiment of the present invention will now be described with reference to the accompanying drawings, in which:-

25 Fig. 1 is a perspective view of an embodiment of access tower in accordance with the present invention, shown in a fully extended or deployed condition;

Fig. 2 is a perspective view of the access tower of Fig. 1, shown in a fully retracted or stowed condition;

Fig. 3 is an enlarged perspective view of the upper portion of the access tower of Fig. 1, shown in the fully extended condition;

Fig. 4 is an enlarged perspective view of the lower portion of the access tower of Fig. 1, shown in the fully retracted condition;

Fig. 5 is an enlarged exploded perspective view, partly cut away, of a lower portion of the access tower of Fig. 1, shown in a partially extended condition; and

Fig. 6 is a cross-section through a modification to the access tower of Fig. 1.

With reference to the Figures, an access tower comprises a movable wheeled base 10 to which is mounted one end of a scissor lift mechanism 12, the other end of which supports a working platform 14. As shown in Figs. 1 and 2, the scissor lift 12 can be actuated to displace the working platform 14 between a fully retracted or stowed condition (Fig. 2) and a fully extended or deployed condition (Fig. 1).

The base 10 comprises four vertical corner posts 16. Each of two elongate parallel hollow lateral main beams 18, 20 extends horizontally between a respective pair of the corner posts 16 as do each of two elongate parallel lower subsidiary beams 22, 24, each of which is located beneath, and parallel to, a respective one of the two main beams 18, 20. A plurality of parallel cross-beams 26 extend horizontally between the lower beams 22, 24 and other reinforcing beams 28 interconnect various components of the base.

The base of each corner post 16 is also provided with a brakeable castor 30 and a support leg 32 which can be adjusted between a supporting ground-engaging position (Fig. 1) and a retracted, stowed position (Fig. 2). The rotational position of each support leg with respect to its corner post can be fixed by means of a lock pin (not shown). Each supporting leg comprises parallel upper and



lower struts 34, 36 which are pivotally mounted both to the associated corner post 16 and to a ground-engaging foot 38. A telescopic strut 40 extends between the corner post adjacent the inner end of the upper strut and the foot 38 adjacent the outer end of the lower strut and can be clamped at a desired length by means of a screw-threaded clamp 42.

It will also be observed that translucent plastic mesh screens 44, 46 extend between the corner posts 16 along each side of the base 10, primarily to prevent limbs or other objects from becoming trapped in the scissor lift mechanism 12.

The scissor lift mechanism 12 comprises two lazy tong mechanisms 12a, 12b, arranged side-by-side and each comprising four pairs of elongate crossed bars 50, the bars of each pair being pivoted to each other at their centre point and the upper end of each bar 50 being pivotally connected to the lower end of the vertically adjacent bar 50 of the pair of bars immediately above. For the uppermost pair of bars 50, one bar of which is pivotally connected to a fixed pivot 54 on the undersurface of the working platform 14 and the other bar of which is pivotally connected to a block 56 which slides in, and projects from a slot in, a hollow lateral beam 58 forming part of the working platform 14. The two lazy tongs mechanisms 12a, 12b are interconnected by a plurality of bars 60 which extend between the pivotal connections at the ends of the bars 50, which improves the lateral stability of the construction.

For each lazy tongs mechanism 12a, 12b the lower end of one of the lowermost pair of elongate crossed bars 50 is pivotally connected to a fixed pivot 62 located on a respective one of the two lateral main beams 18, 20. The lower end of the other of the lowermost pair of crossed bars 50 is pivotally connected to a block 64 which slides within a respective one of the two main beams 18, 20. The block 64 is provided with a lower planar nylon runner 65a over the whole of

its undersurface and an upper elongate nylon runner 65b set into a longitudinally-extending elongate recess in its uppermost face.

As best seen in Figs. 4 and 5, the block 64 is generally rectangular in cross-section and is dimensioned to fit snugly within the beam 18, 20. A lug 66 fixedly attached to the lower end of the lowermost bar 50 of the lazy tongs mechanism 12a, 12b passes through an elongate slot 68 in the upper wall of the beam 18, 20 and is pivotally connected to a threaded boss 70 which is secured to the block, passes through an elongate slot 70 in a side wall of the beam 18, 20 and through a cut-out 72 in an elongate retaining plate 74 and screw-threadedly receives a hand-actuated securing nut 76.

The block 64 is biased away from the position in which the access tower is stowed by means of a tension spring in the form of an elastic bungee-type cord 78 connected between one end face of the block and a fixed mounting point (not shown) within the beam 18, 20 and a first metal compression spring 80 engaged with the opposite end face of the block 64. A suitable product is the "PowerSpring" spring manufactured by Lee Spring Limited of Wokingham, England. In addition, a further, short metal compression spring 82 is arranged outside of, and coaxially with, the first metal compression spring 80 and engages with the end face of the sliding block 64 only during the initial portion of travel of the block towards or away from its extreme position in which corresponds to the stowed condition of the access tower.

The properties of the bungee-type cord 78 and first spring 80 are chosen so that the forces which may apply to the blocks 64 are sufficient to approximately balance the forces in the opposite direction from the weight of the scissor lift mechanism 12 and the working platform 14 so that, as will be explained, only a small manual effort will be required to raise or lower the lifting platform 14.

As mentioned previously, the threaded boss 70 on which the lazy tongs mechanism 12a, 12b is pivotally mounted passes through a cut out 72 in a retaining plate 74. Each of the two main beams 18, 20 is provided with a retaining plate 74, each of which is pivotally mounted towards one end on a pivot pin 84 projecting from the inner face of the main beam 18, 20. The cut-out comprises a series of notches 86 which are interconnected by a common longitudinally extending channel 88. The uppermost portion of each notch 86 (except the distal notch) on the side towards the pivot pin 84 is formed into an inclined shoulder 87 to allow the threaded boss 70 to move easily from one notch 86 to the next as the access tower is erected, as will be explained.

Each retaining plate 74 is biased towards a direction in which the threaded boss 70 engages in one of the notches 86, by means of a compression spring 90 mounted on the main beam 18, 20 on the opposite side of the pivot from the cut-out 72 and engaging with a lug 92 secured to the retaining plate 74. The retaining plates 74 are movable against the restoring forces of the two springs 90 by means of a pivotally-mounted foot-actuated treadle 93, which is pivotally connected to the lower end of each of two vertically extending connecting rods 94, one upper end of each of the connecting rods being pivotally connected to the end of a respective one of the retaining plates 74.

The arrangement of the retaining plates 74, the bosses 70 and the treadle 93 is such that, as the blocks 64 are displaced along the side beams 18, 20 in the direction corresponding to erection of the access tower, each of the bosses 70 slides along the longitudinally extending channel 88 in its retaining plate by pivoting the plate downwardly against the restoring force of the spring 90 to allow the bosses 70 to enter the longitudinally extending channel. The bosses 70 can be retained in a desired position by tightening the hand-actuated nuts 76. This would

normally be done when the bosses 70 are each received fully in one of the notches 86.

At the opposite end of the scissor lift mechanism, the blocks 56 are slidable along the lateral beams 58 as described previously. However, in the embodiment described there are no spring members directly engaging the blocks 56 although the blocks 56 can be clamped in a desired position by means of hand-actuated securing nuts 96 which are screw-threadedly received on a threaded boss 98 projecting through a slot in the inner side wall of each of the lateral beams 58.

One side of the scissor lift mechanism 12 also carries a series of rungs 100 which are each pivotally mounted at one end of two pairs of short supporting beams 102, the other end of the beams 102 of each pair being pivotally connected to adjacent upper and lower crossed bars 50 of one of the lazy tong mechanisms 12a, 12b at a point one quarter the length from the upper end of the upper crossed bar 50 and at a point one quarter the length from the lower end of the lower crossed bar 50. In this way, the rungs rise and fall with the scissor lift mechanism 12 and are positioned mid-way between the vertically adjacent bars 60 which extend between the pivotal connections at the ends of the bars 50.

The same side of the scissor lift mechanism 12 also carries two collapsible guard rails 104, secured to the two uppermost bars 60. The guard rails 104 comprise two complementarily profiled curved lengths 106 of plastic which slide one inside the other and one end of each of which is secured to a respective one end of the bar 60. The guard rails 104 can be extended to the position shown in Fig. 1 by sliding apart the two lengths 106 or can be collapsed by sliding one length inside the other.

The working platform 14 comprises a generally planar metal floor 107 secured to the lateral beams 58. The end portion of the floor 107 immediately above the rungs 100 and guard rails 104 is formed into a pivotally-mounted access

door 108. The floor 107 is surrounded by a safety cage formed by guard rails 110 and shallow side walls 112 extend upwardly from the periphery of the floor 107.

The access tower is stored in the stowed condition illustrated in Fig. 2, namely with the scissor lift mechanism 12 and the support legs 32 in the retracted condition. The hand-actuated securing nuts 76 and 96 are also tightened to lock the tower in the stowed condition. The access tower can then be wheeled to the desired location when desired and the castors 30 locked in position.

When it is desired to use the access tower, it can be transported to the appropriate location at which the castors 30 are braked and the support legs 32 are deployed in to the position shown in Fig. 1 with the feet 38 engaging the ground. The telescopic struts 40 are then clamped in position by means of the clamps 42.

The next stage is to slacken off the hand-actuated securing nuts 76 from the main side beams 18, 20 and the hand-actuated securing nuts 96 from the lateral beams 58 of the working platform and to extend the guard rails 104 into the operative position illustrated in the Figures. The working platform 14 can then be raised by pulling upwardly on either the rungs 100 or the bars 60 extending between the pivotal connections at the ends of the bars 50. The forces applied to the block by the tension spring (bungee-type cord) 78 and the compression spring 80 urge the blocks 64 in a direction which causes expansion of the scissor lift mechanism. In addition, for the first part of the motion of the block 64 away from the stowed position the additional compression spring 82 also assists in raising the working platform 14. As explained previously, the forces applied by the tension springs 78 and the compression spring 80 are intended to approximately balance the force applied to the blocks 64 from the working platform 14 and the lazy tongs framework 12 in the opposite direction. As a result, the working platform 14 can be raised into the desired position with very little manual effort.

As explained previously, as the blocks 64 slide along their respective main beams 18, 20, the projecting bosses 70 successively engage in the notches 86 in the retaining plate 74. Engagement of the bosses 70 in the notches 86 prevents downward movement of the working platform 14 and scissor lift mechanism 12 and thus guards against inadvertent collapse of the scissor lift mechanism. However, the inclined shoulder 87 on one side of each of the notches 86 allows further longitudinal movement of the blocks 64 in the direction corresponding to extension of the scissor lift mechanism 12 by pivoting the retaining plate 64 against the restoring force of the springs 90, until the bosses 70 engage with the next notch 86.

When the working platform has been raised to the desired height, the hand-actuated nuts 76 are tightened in order to lock the blocks 64 in position. This would normally be done when the bosses 70 were engaged with one of the notches 86, for added safety, in which case the working platform could be raised to one of a plurality of predetermined heights.

As explained previously, as the scissor lift mechanism 12 expands, the rungs 100 move with the mechanism to lie midway between vertically adjacent horizontal bars 60 extending between pivotally-connected ends of the main bars 50 of the scissor lift mechanism. In this way, a ladderway is formed by the bars 60 and rungs 100 located between vertically adjacent bars 60, to allow a person to climb up one side of the scissor lift mechanism 12 towards the working platform 14.

As the person climbing the ladder way approaches the undersurface of the working platform 14, the securing nuts 96 are tightened against the lateral beams 58, to further secure the platform in place and to provide additional rigidity to the construction. The access door 108 can then be pivoted upwardly to gain access to

the working platform 14 and once the person is located within the working platform, the access door 108 can be pivoted shut.

When it is desired to collapse the access tower, the reverse sequence of events is adapted.

5 The invention is not restricted to the details of the foregoing embodiment.. In particular, it is envisaged that the guard rails 104 around the working platform could be arranged to be collapsible to reduce the size of the access tower when in the stowed position.

10 Moreover, the elastic bungee-type cord spring 78 could be replaced, if desired, with a different type of tension spring, for example a conventional coiled metal tension spring.

15 Furthermore, although in the previous embodiment the force applied to the lower end of the scissor lift means is in the form of a biasing means, other means, preferably manually powered, for applying force to the lower end of the scissor lift means may be used alternatively or in addition. For example, as illustrated schematically in Fig. 6, the means for applying a force may comprise two screw-threaded bars 114, a respective one extending longitudinally through, and being rotatably mounted in, each of the main beams 18, 20 and being screw-threadedly engaged with a respective one of the blocks 64, whereby rotation of the screw-threaded bars (e.g. by means of manually-operated handles 118 connected to one  
20 end of the bars) causes displacement of the blocks 64 along the beams 18, 20 and thereby extension and retraction of the scissor lift means 12.





1/5

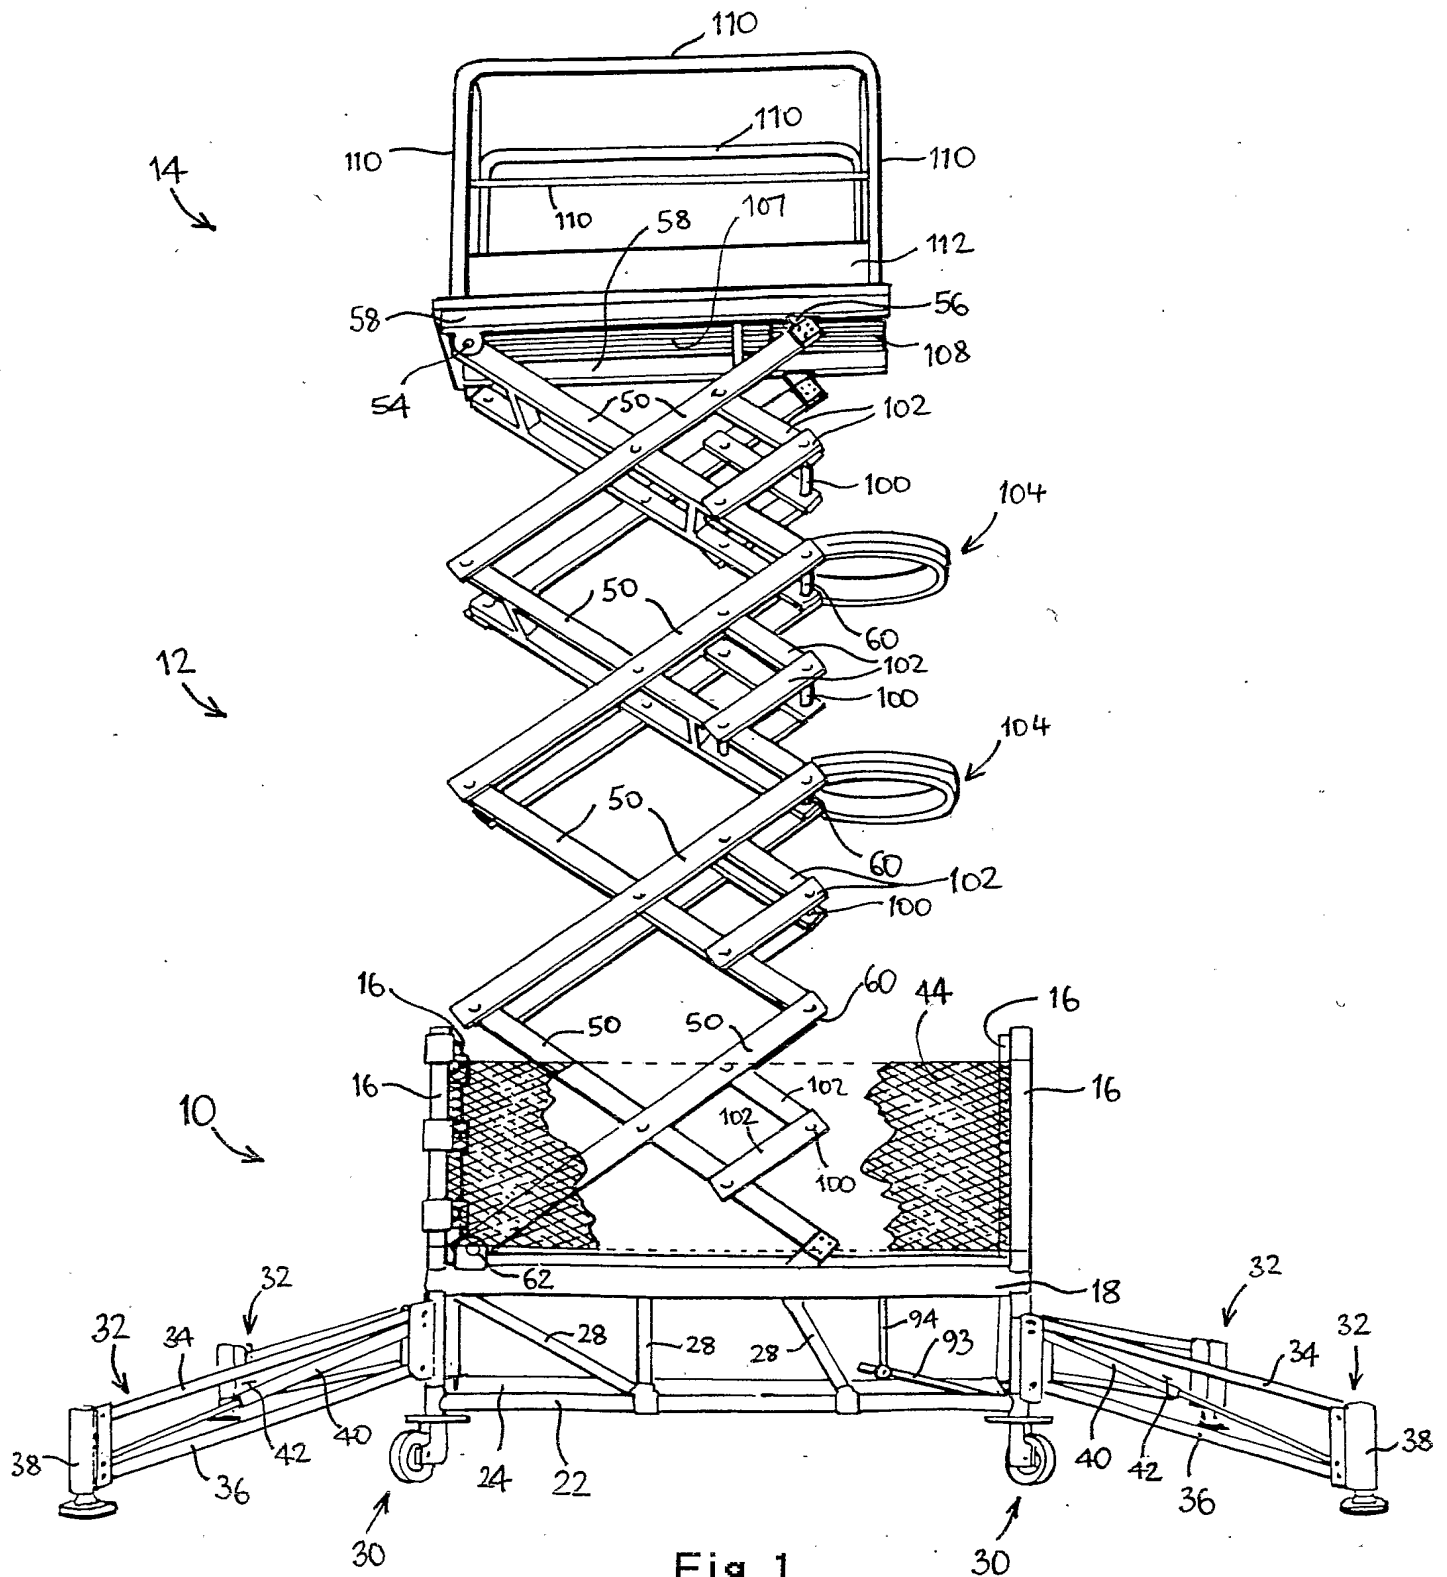


Fig. 1



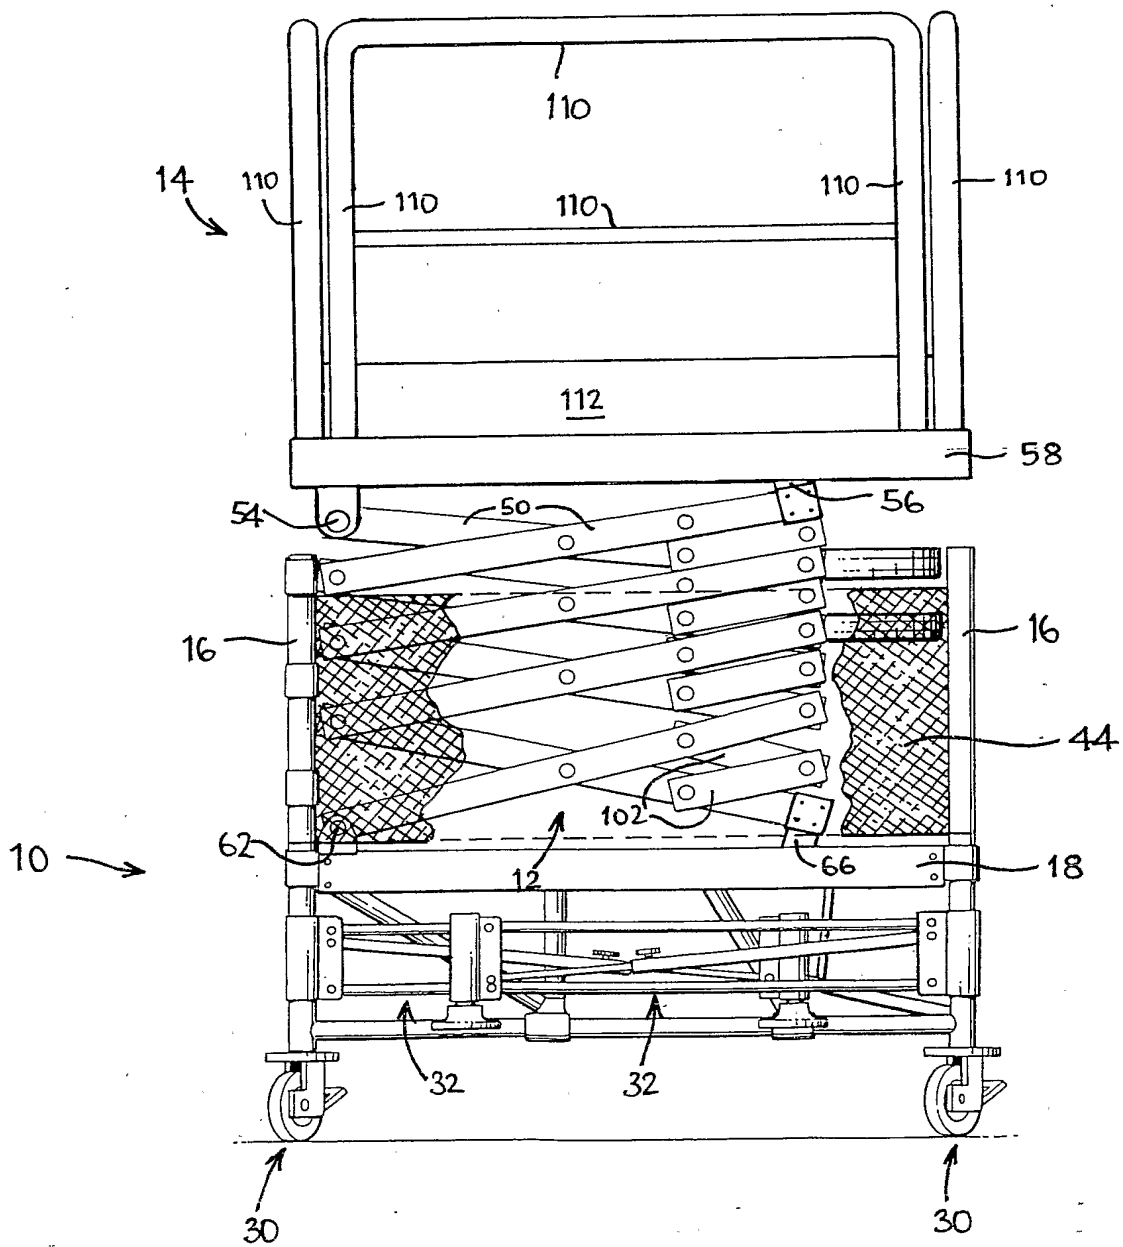
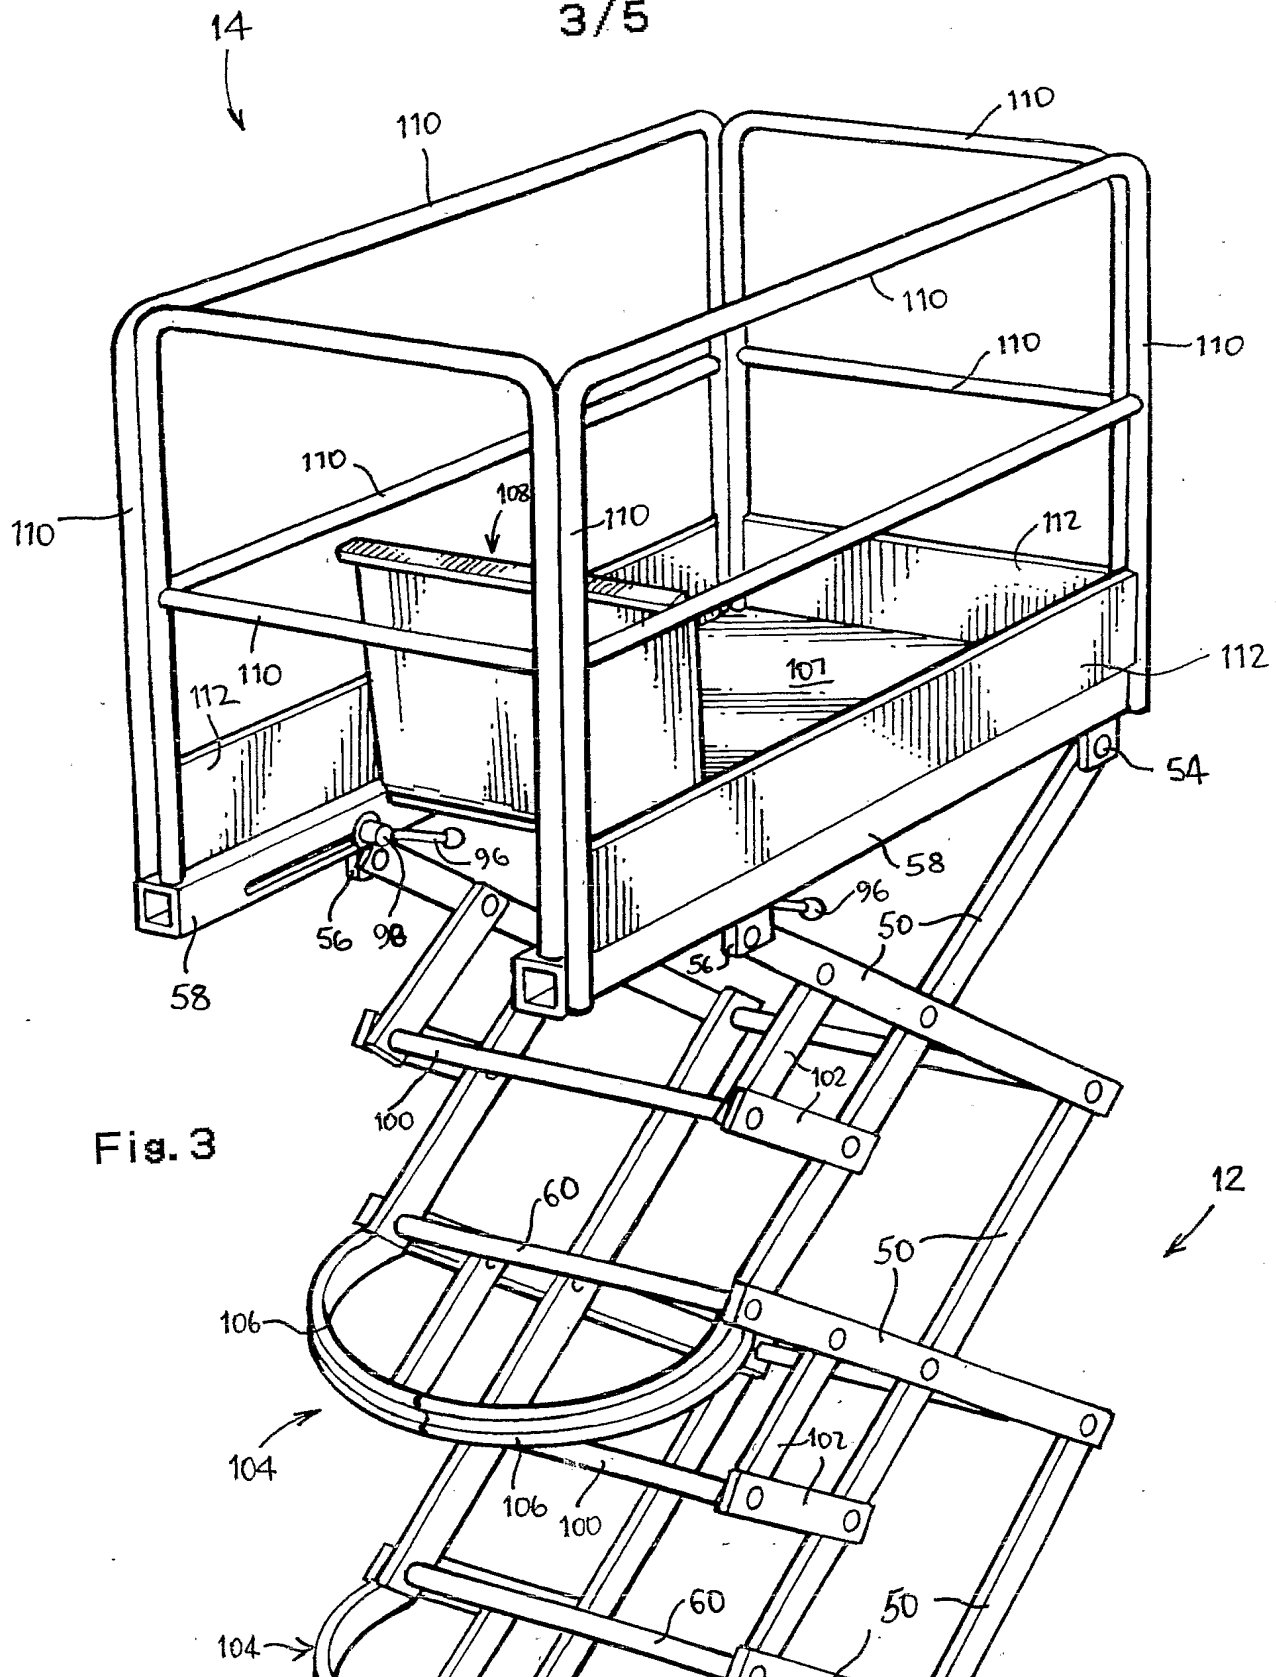


Fig. 2







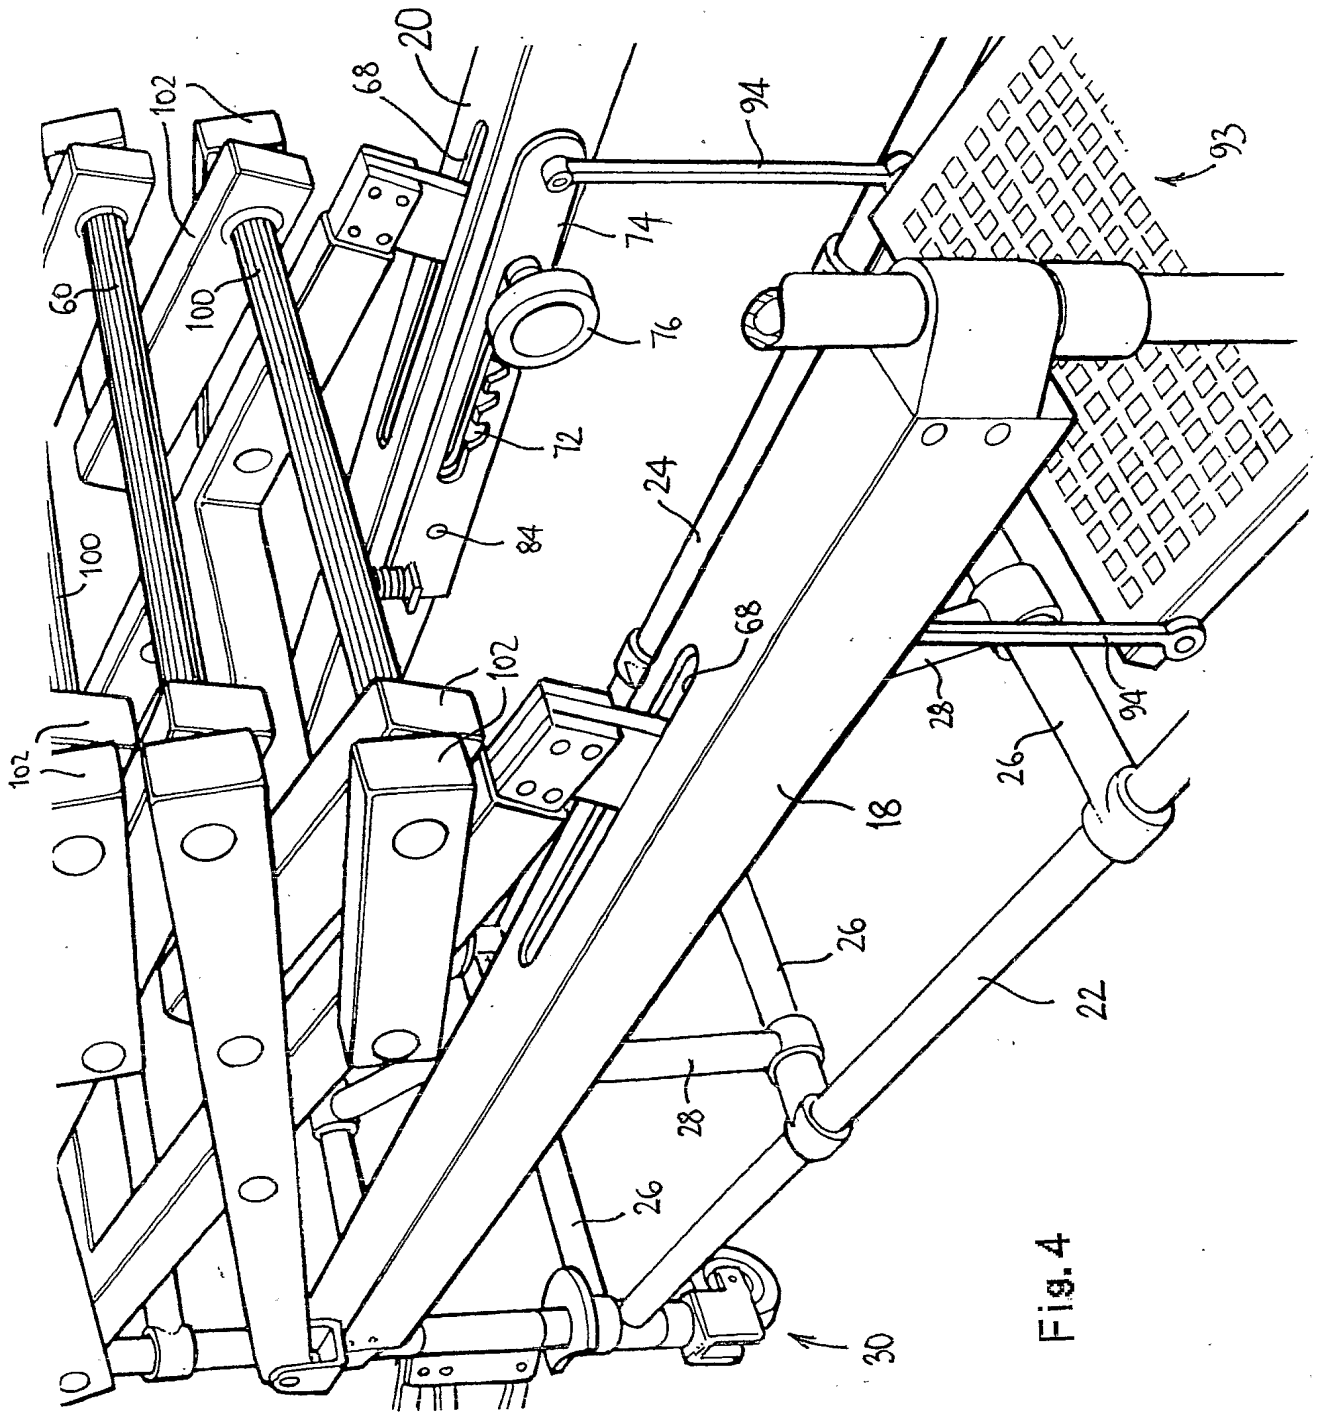


Fig. 4






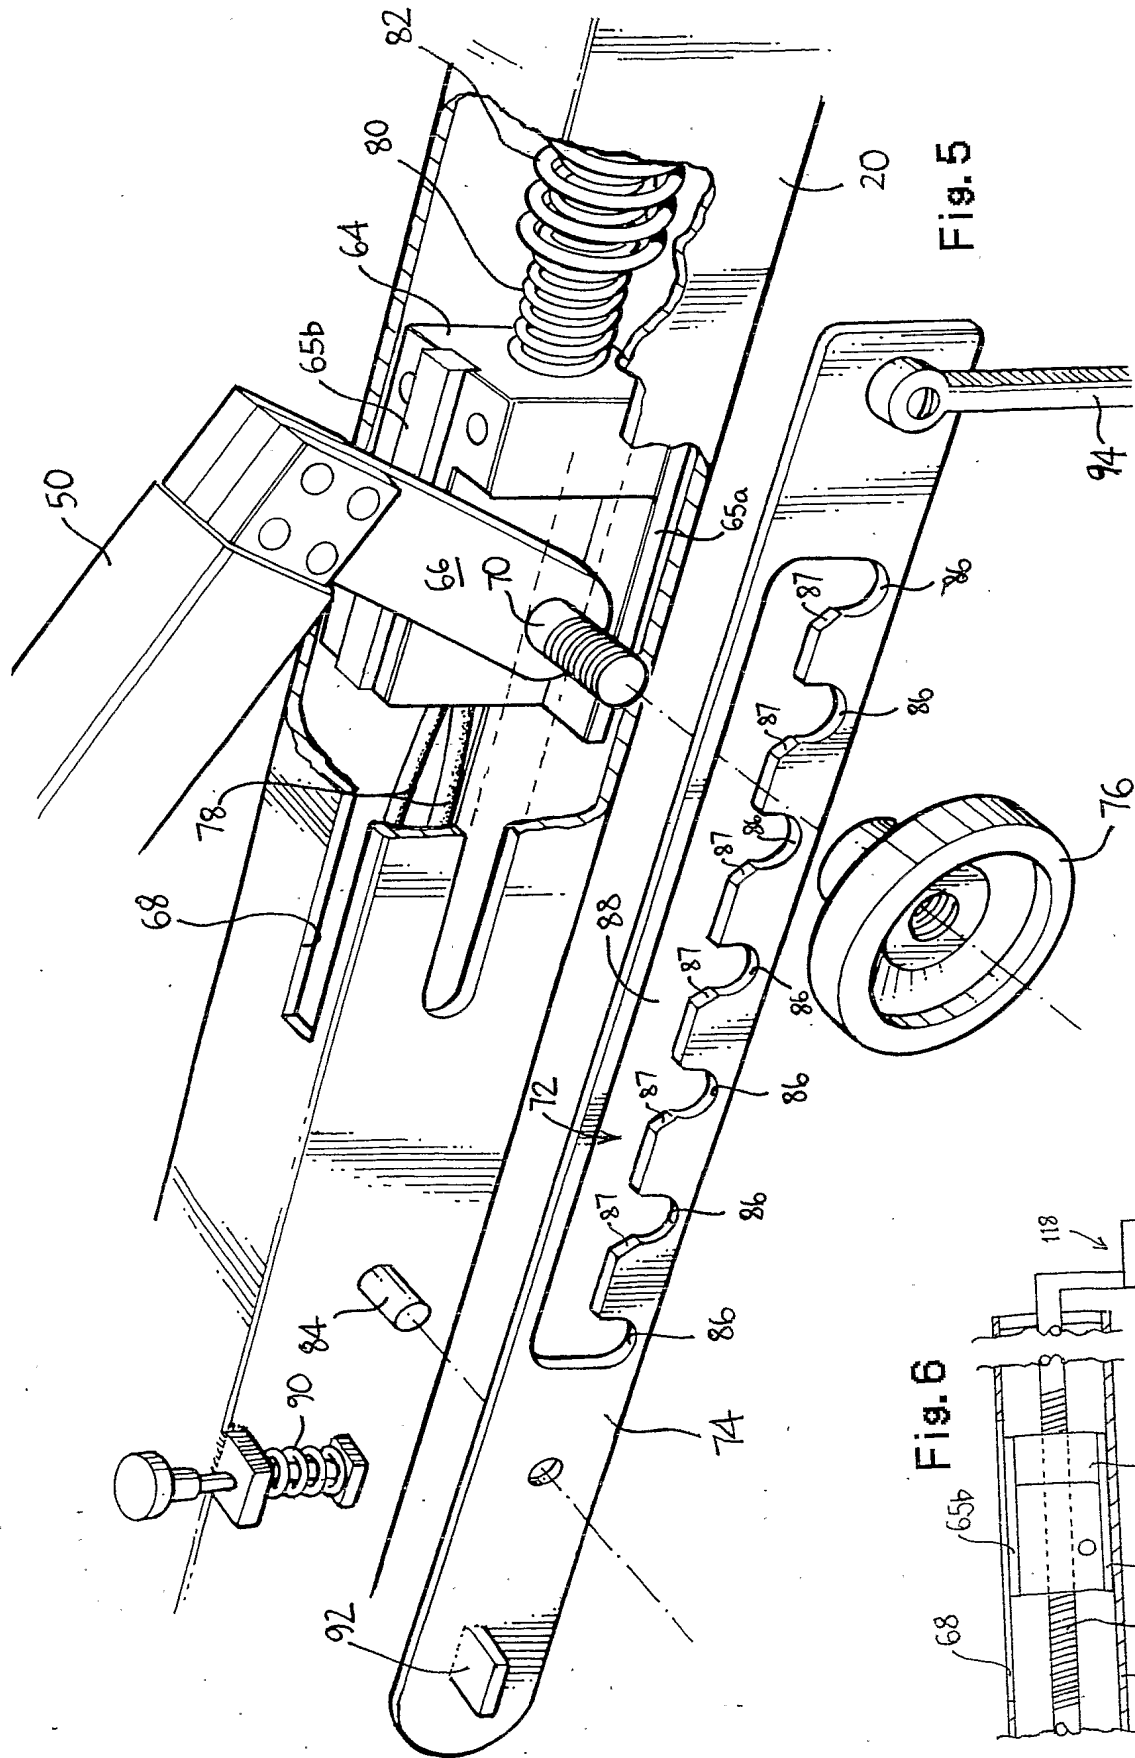


Fig. 5

Fig. 6



PCT/GB2005/000025

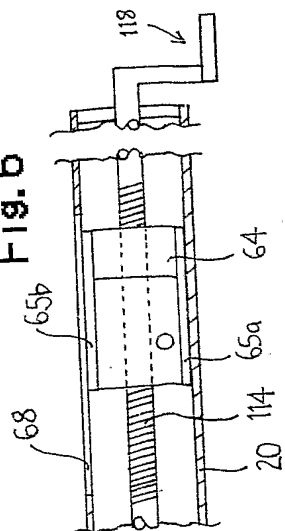